



QUICK OPERATING GUIDE

1: Quick Operation


The default IP address is 192.168.0.99, keep IP address of the computer and the dome on the same network segment before access to the dome through the browser.


In IE browser address bar enter the IP address, enter the login page. User Name :admin; Password: admin; Click  to get into "Live View" screen. For the first access, users need to download and install the plug-in according to page tips, then in the Web Components click "Next". Please close the browser when installing.

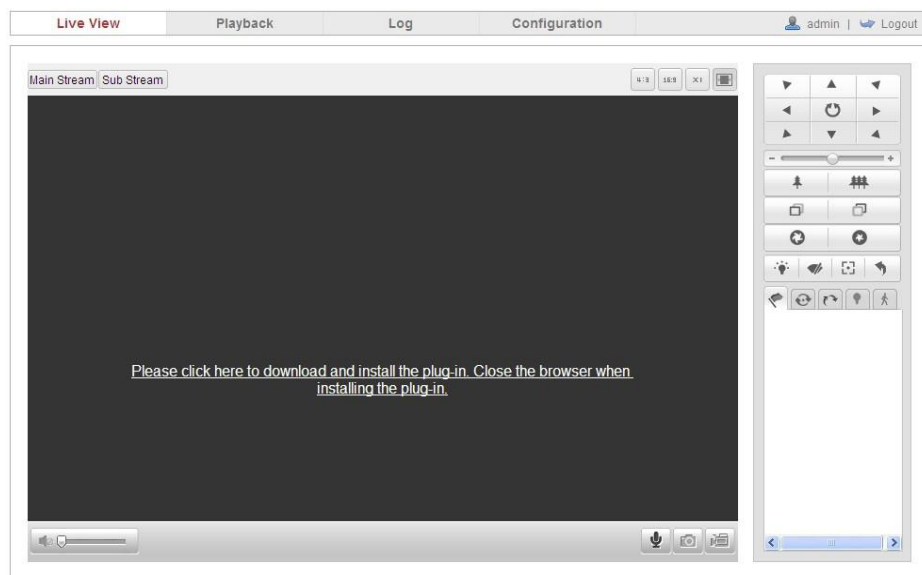


QUICK OPERATING GUIDE


2: IP Address Modification


Live View Screen→Configuration→Network→TCP/IP,
After the modification, click  to save the setting

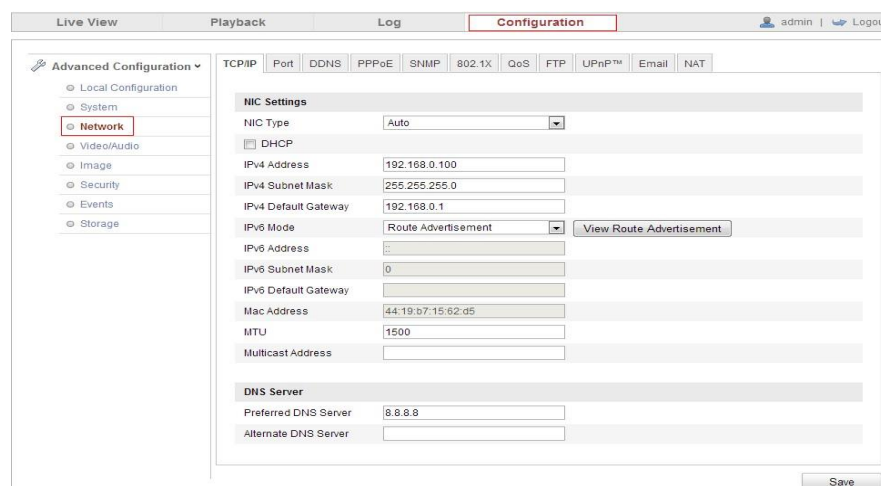









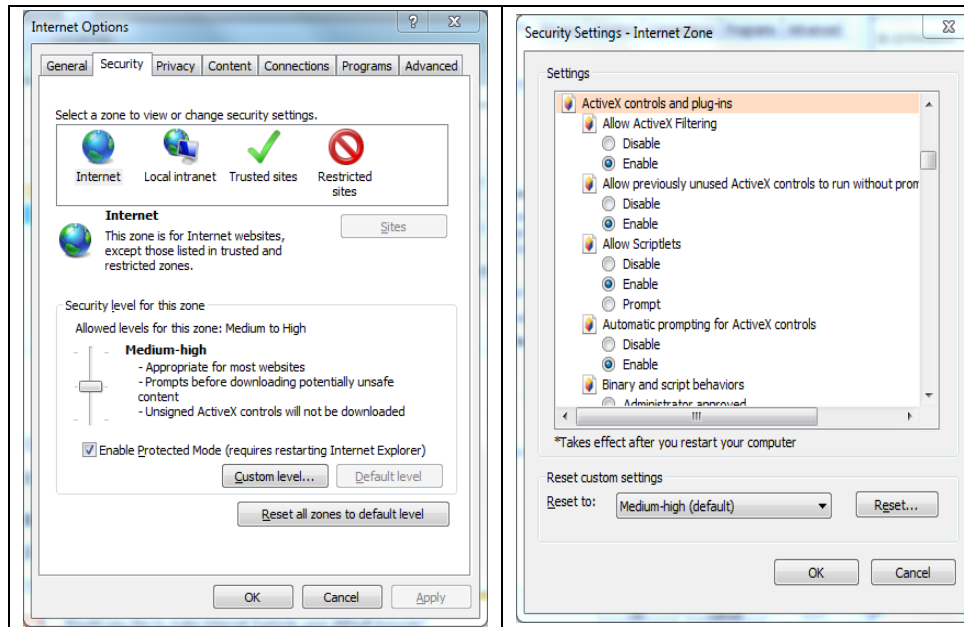
















In "TCP/IP" screen, users can set "NIC Type", "IPv4 Address", "IPv4 Subnet Mask", "IPv4 Default Gateway", "MTU", "Multicast Address", "Preferred DNS Server", "Alternate DNS Server". Check "DHCP" and the device obtains IP address automatically. After changing some parameters and click  to save the corresponding settings.

After successful installation of plugin, if there is still no video, and Live View screen prompts “Restrict site with no safe way to use ActiveX”. In this case, users need to enter “Internet Options”→ “Custom Level”→ “Security Settings-Internet Zone”, then for all ActiveX controls and plug-ins, please choose to “Enable” or “Prompt”, restart the installation.



After the installation, login the dome again and enter user name and password. Click  to get into “Live View” screen.

ICON	Instruction
	Preview screen 4:3 ratio
	Preview screen 16:9ratio
	Original preview screen size
	Self-adaptive preview screen
	Choose main or sub stream
	volume
	Start Two-way Audio
	Stop Two-way Audio
	Capture
	Record
	Start 3D Zoom
	Control the Horizontal and vertical motion, open/close auto scan
	Zoom
	Focus
	Iris
	PTZ Speed
	Light
	Wiper
	Auxiliary Focus
	Patrol
	Preset
	Pattern
	Lens Initialization
	IR Setting
	Track Setting