



How to add GW55 series NVR and GW95 series XVR to VMS client and start live view.

1. Install and download VMS client: [Link](#)
2. After installation, you will need to create a password:

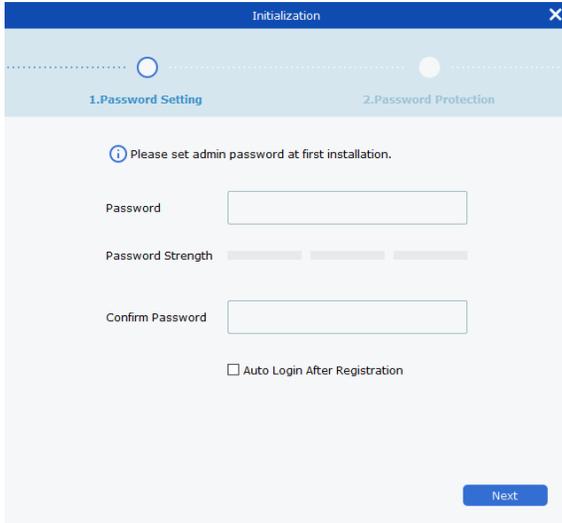

The screenshot shows the 'Initialization' window with a progress bar at the top. The first step, '1.Password Setting', is active. The instructions read: 'Please set admin password at first installation.' There are two text input fields: 'Password' and 'Confirm Password'. A 'Password Strength' indicator is shown below the first field. A checkbox for 'Auto Login After Registration' is located below the second field. A blue 'Next' button is at the bottom right.

And set up security questions. Click on Finish to complete the step


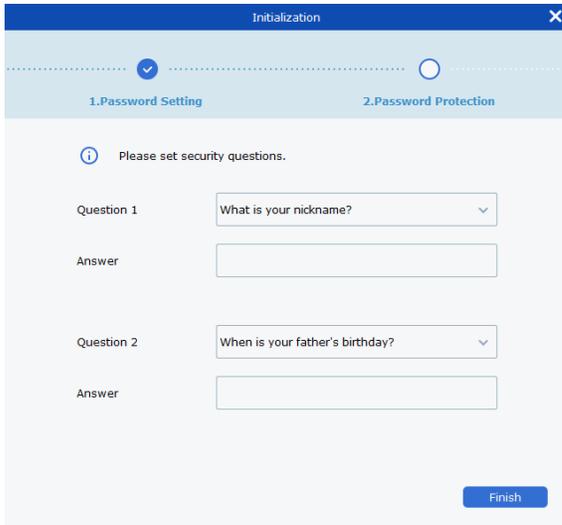


The screenshot shows the 'Initialization' window with the progress bar indicating the second step, '2.Password Protection', is active. The instructions read: 'Please set security questions.' There are two sets of questions. 'Question 1' is 'What is your nickname?' with a dropdown menu and an 'Answer' text input field. 'Question 2' is 'When is your father's birthday?' with a dropdown menu and an 'Answer' text input field. A blue 'Finish' button is at the bottom right.


3. After completing the above step, the VMS client will bring up the main view:



- From the main view screen, click on the “” icon to bring up the main menu:

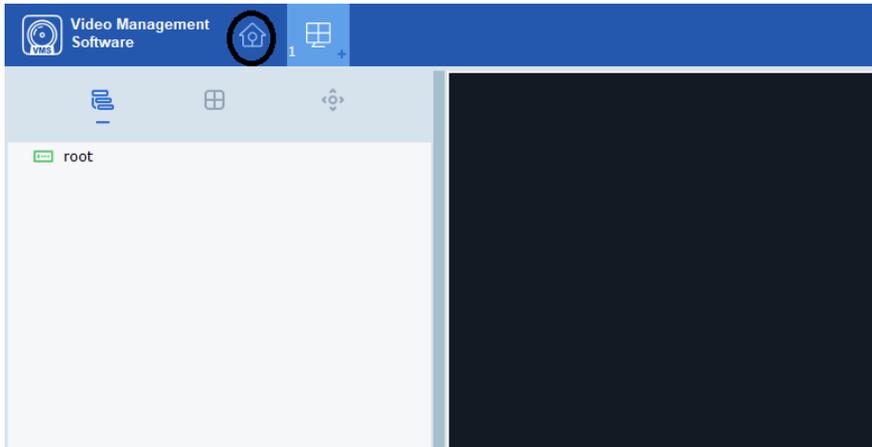

- From the main view, click on “”

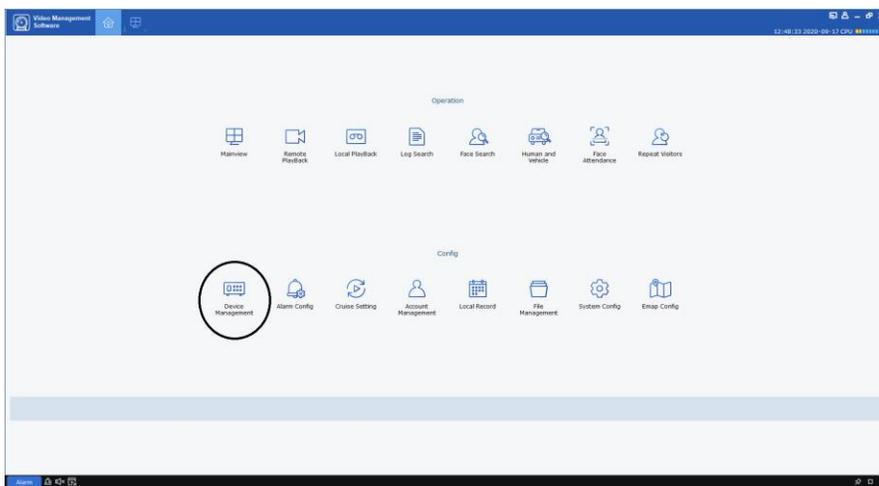


- From the “Device Management” section, there are two ways to add a device; manual or auto search.
 - To auto-add a device, click on “Auto Search”, and then click on “Search”. If the device is connected to the network, you will see it listed

No.	Device Name	IP	Port	ChannelNum	Mac address	Version	P2PID	Operation
1	GW5516NPG	192.168.10.86	9000	16	00-23-63-7A-E2-79	V8.1.0-20200811	0023637AE279	+ [edit] [checkbox]


Clicking on the icon below P2PID will show the P2P ID. Click on the “” will add the

device using local IP address and will prompt you to enter the username and password for your NVR/XVR

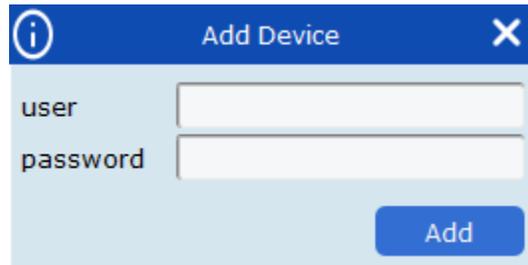

The image shows a dialog box titled "Add Device" with a blue header bar containing an information icon on the left and a close icon on the right. Below the header, there are two input fields: the first is labeled "user" and the second is labeled "password". At the bottom right of the dialog, there is a blue button labeled "Add".

Once the device is added, it will show under "All equipment". From here, you can edit the device by clicking on the "🔧" icon and modify it to connect via P2P ID if you wish to. Switching the login type to P2P ID will automatically fill in the P2PID field.

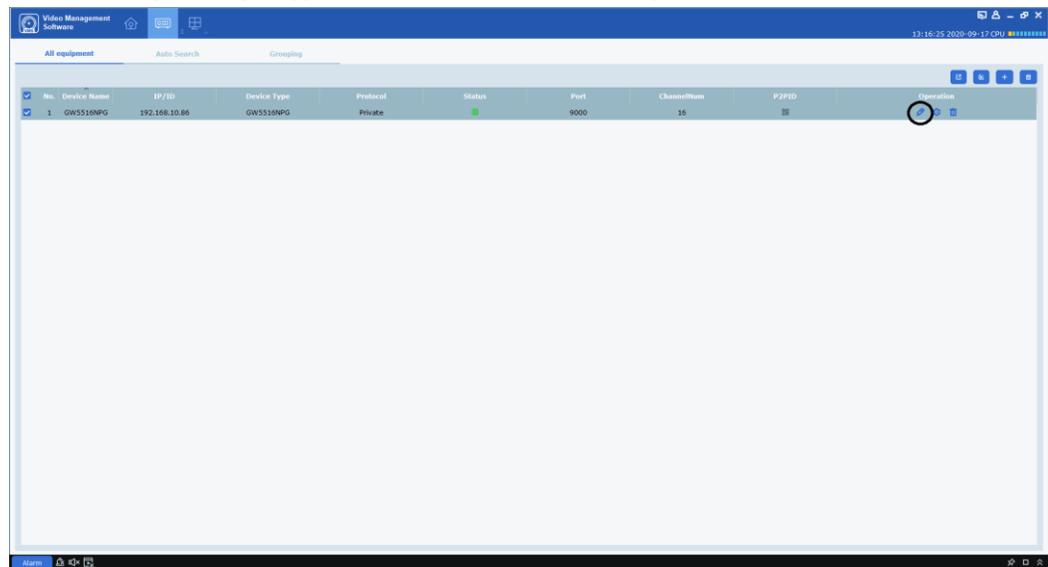

The image shows the "All equipment" section of the Video Management Software. It features a table with the following columns: No., Device Name, IP/ID, Device Type, Protocol, Status, Port, Channel/Room, P2PID, and Operation. A single row of data is visible, with a pencil icon in the Operation column circled in red.

No.	Device Name	IP/ID	Device Type	Protocol	Status	Port	Channel/Room	P2PID	Operation
1	GW5510NPG	192.168.10.66	GW5510NPG	Private	■	9000	15		

Modify Device

Device Name: GW5516NPG

Login Type: IP

IP: P2PID

Protocol: Private

Media Port: 9000

User Name: admin

Password: ●●●●

Login status: Device login successful

Modify Cancel

Modify Device

Device Name: GW5516NPG

Login Type: P2PID

P2PID: YJFFWGKSEJDGH8DE111A

Protocol: Private

Media Port: 9000


User Name: admin

Password: ●●●●

Login status: Device login successful

Modify Cancel

b. To manually add a NVR, click on the “+” icon

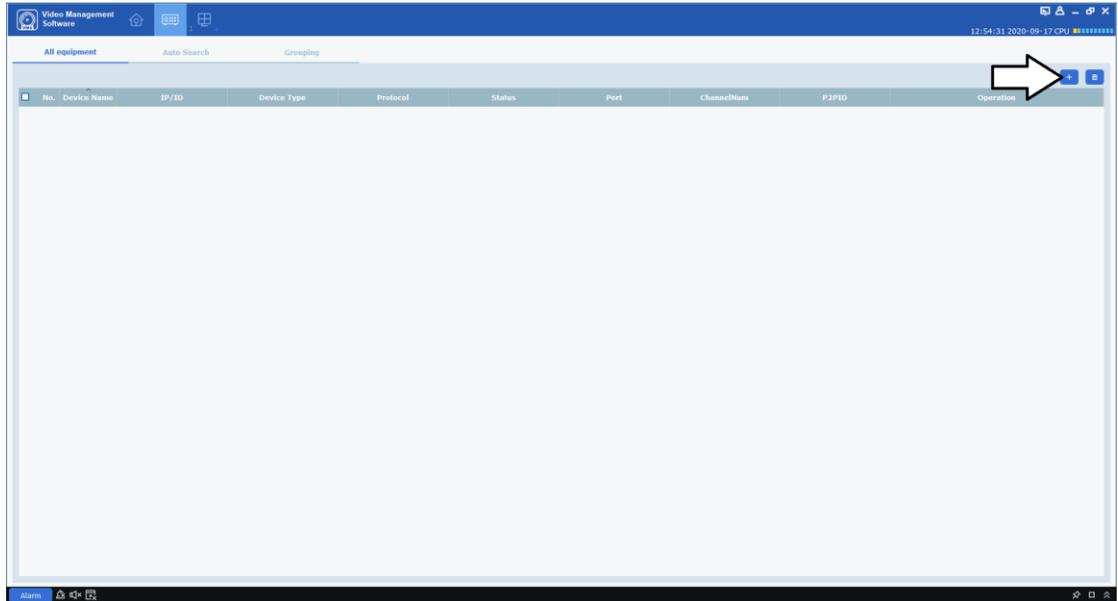

Input the required information in the next screen then click on “Add”

The 'Add Device' dialog box is shown with a blue header containing an information icon, the title 'Add Device', and a close button. The form fields are as follows:

- Device Name:
- Login Type:
- IP/ID:
- Protocol:
- Media Port:
- User Name:
- Password:

At the bottom, there are two buttons: 'Add' and 'Cancel'.

“Device name” is a name for the device.

“Login type” can be “IP” or “P2PID”,

“IP/ID” will depend on the login type.

“Media port” by default should be 9000


“User name” is the login username for your NVR

“Password” is the login password for your NVR


7. After the device has been added, click on “Main View”



8. Right-click on the device listed on the left hand side and choose “Open all ch”. You should see all channel’s live stream open.

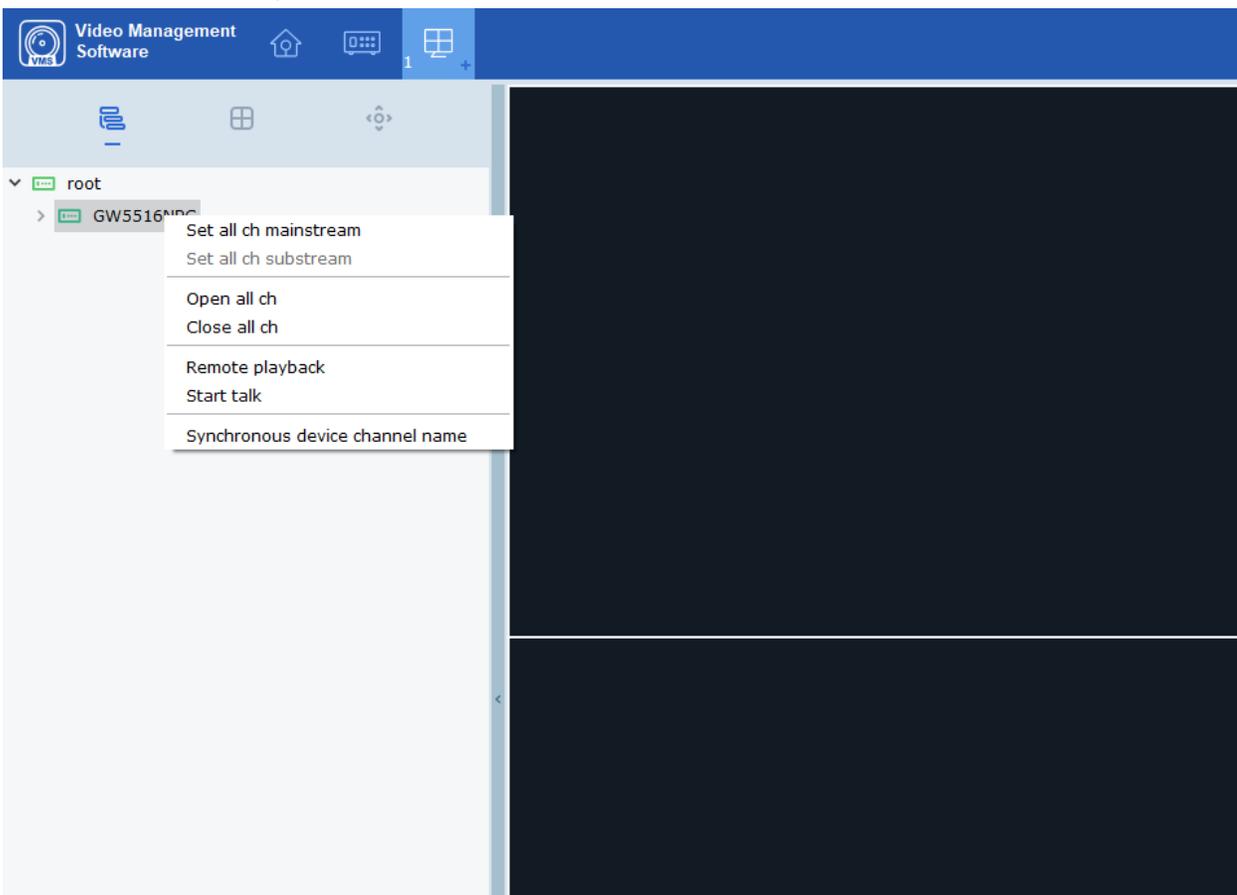

9. After you close the VMS client, the next time you open the client you will be asked to login. The login information is the one you created in step 2. You can choose “Auto Login” to avoid this step:

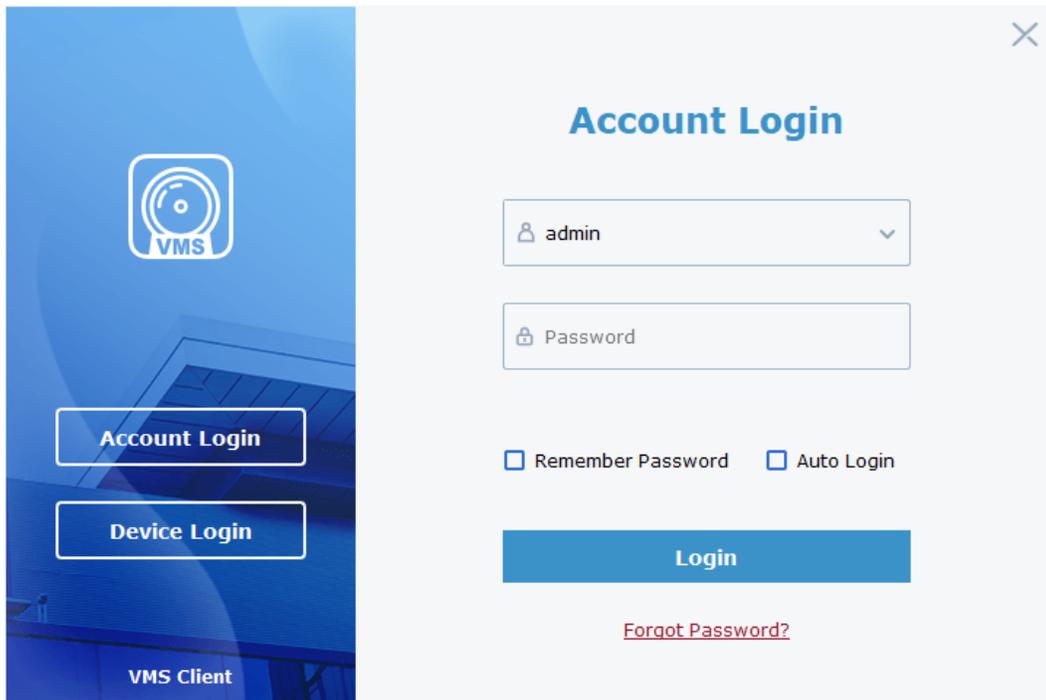

10. After login, click on main view should automatically start the cameras you opened from your last session.